

EP 41412 (2)

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number
WO 01/33847 A1

(51) International Patent Classification⁷: H04N 5/92, 7/16

(21) International Application Number: PCT/US00/40908

(22) International Filing Date:
15 September 2000 (15.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/162,624 29 October 1999 (29.10.1999) US

(71) Applicant: OPENTV, CORP. [US/US]; 401 East Middlefield Road, Mountain View, CA 94043-4005 (US).

(72) Inventors: PIERRE, Ludovic; 1210 Dolores Street, #3, San Francisco, CA 94110 (US). DUREAU, Vincent; 3519 South Court, Palo Alto, CA 94306 (US). DELPUCH, Alain; 34, parc des Essarts, F-78690 Les Essarts (FR).

(74) Agent: CONLEY, ROSE & TAYON, P.C.; Kivlin, B., Noel, P.O. Box 398, Austin, TX 78767-0398 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PLAYBACK OF INTERACTIVE PROGRAMS

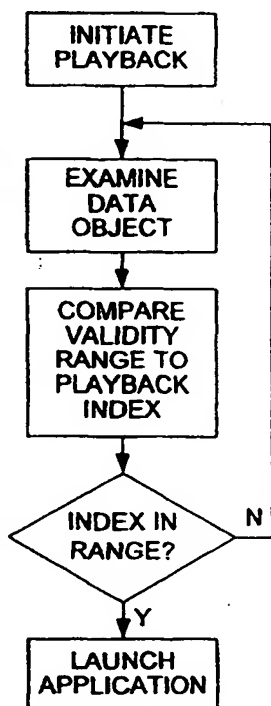

(57) Abstract: A method for playing back a program which includes one or more interactive applications. A program which is stored, either in the form of a data stream or as a set of files is played back from a storage device. When playback is started, applications which are detected are launched. Applications are detected in the playback of pushed content when they become available in the playback stream. Applications are detected in the playback of pulled content by comparing the validity ranges of the applications to a current playback index. When special playback modes are used, signals which affect the lifecycle of an application are detected and corresponding signals are generated to maintain the proper state of the application. During these special playback modes, these various notification signals may be conveyed to applications which are configured to operate during these modes. Applications which are not configured to operate during these special playback modes may be terminated when the special modes are initiated and restarted when the special modes end.

WO 01/33847 A1

as independently accessible files.) or they may be stored as a preconstructed data stream. It should be noted that the program may also contain streams of data (e.g., audio and video) which are not transmitted as data objects. If the data objects of the program are stored as individual files, they are retrieved by broadcast station 12 from program source 15 to be sequentially broadcast. If the program is stored as a preconstructed data stream, the stream can be broadcast essentially as it is stored. The program data may be compressed and control information may be added to the data for use by the interactive television system. The program data and any additional information is then converted by broadcast station 12 to a format suitable for transmission over broadcast medium 13. In this particular embodiment, the data is formatted into packets which can be transmitted over a digital satellite network. These packets may be multiplexed with other packets for transmission.

10 Broadcast station 12 transmits the data objects of the program in a carousel which is cyclically transmitted to receiving station 14. This produces a stream of data in which each data object is transmitted repeatedly. It should be noted that the broadcast medium (a digital satellite network in this embodiment) can support a number of different channels, and that different carousels (and corresponding data streams) can be concurrently broadcast on these channels. When receiving station 14 receives the data stream, the program contained in the data stream may be played immediately or it may be recorded. If the program is to be played immediately, receiving station 14
15 converts the data stream back into the data objects and uses them as necessary in the program. If the program is to be stored, it may be parsed into the individual data objects and stored as a set of files, or it may be stored as a data stream, as it was received. If the program is to be stored, it is conveyed to storage device 16. Data streams which are included in the program (e.g., audio or video streams) may also be stored on storage device 16. The program
20 may be stored whether it is immediately played or not.

Receiver 18 is typically implemented in a set-top box which is connected to television 17. The set-top box incorporates a control unit (e.g., a microprocessor,) a memory, and other components which are necessary to select and decode the received interactive television signals. Because the basic components and features of set-top boxes are known, they will not be discussed in detail here. Typically, set-top boxes are designed to provide the necessary
25 interactive functionality at a minimal cost. Consequently, they normally have a limited amount of memory and no storage devices (e.g., hard disk drives.) While the memory is sufficient to execute interactive applications, it is not adequate to store the applications for an indefinite period of time. Therefore, the applications do not normally remain in memory when they are no longer being executed.

Even if the memory of the set-top box were large enough to store some interactive applications, it might
30 still be too small to accommodate a program which includes large amounts of audio or video data, application code, or other information. In one embodiment of the present system, storage device 16 is coupled to the set-top box to provide sufficient storage to record programs that will not fit in the limited amount of memory in the set-top box. Storage device 16 may comprise any suitable storage device, such as a hard disk drive, a recordable DVD drive or optical disk drive. It can be internal to the set-top box, or it may be connected externally. Storage device 16 can be
35 connected permanently or removably to the set-top box.

Referring to Fig. 2, the structure of a carousel (and a corresponding data stream) which is transmitted to the receiver is illustrated. Carousel 24 comprises data objects 21-23 and carousel information 20. Data objects 21-23 are retrieved from a program source as described above. Carousel information 20 is provided by the broadcast station and may contain information such as the carousel ID and version number, a file access table or directory for

the carousel, and various other information. (Portions of this information, such as the file access table, are not necessary in programs which are intended for immediate consumption.) The broadcast station transmits carousel information 20 and data objects 21-23 sequentially. The first instance of the transmission of carousel 24 is indicated by 25. After the broadcast station has completed transmission of the first instance of carousel 24, it is transmitted again, as indicated by 26. The successive, cyclical transmissions of carousel 24 indicated by 25-29 form data stream 30. Transmission of the carousel may be repeated indefinitely.

As mentioned above, the data objects which comprise a program may include application code, audio and video data, control signals, raw data and other types of information. If the program is to be immediately consumed (i.e., presented to the user,) the data must be parsed to extract the data objects from the stream. When the necessary data objects have been extracted, the program is played. The data objects are used as defined in the program. For example, any applications which need to be executed are launched, any audio or video data which needs to be presented to the user is played or displayed, any signals which need to be produced are generated, and so on. The program is presented to the user, typically via a television 17, and is consumed. Regardless of whether or not the program is immediately presented to the user, it can also be stored. The storage device can be used to store programs "as is" (i.e., as a data stream which is essentially the same as that received in the broadcast signal) or as a set of files that can be individually accessed or updated. In either case, the recorded program can be played back. The present system and method are employed to facilitate and/or enable the use of playback features such as trick play modes when viewing the recorded program. To illustrate the advantages of the system and method, it may be useful to examine the structure of a program.

As noted above, a program may consist of a number of data objects and data streams. These data objects may reference each other, they may trigger certain events, or they may be triggered by certain events. Interactive applications which are contained in the program may be started and stopped while the program is being played. If the data objects are stored as files, the validity ranges associated with the files correspond to the times during which they are available to the program. For example, as long as a data object is being broadcast as part of a carousel, that data object is valid. When the carousel (hence the data object) is no longer being broadcast, the data object is no longer valid. Thus, a start time and an end time defining the validity range of the data object can be determined by the receiver and stored with the corresponding file.

It should be noted that, although the present disclosure is directed primarily to an interactive television system which is configured to play back a previously stored broadcast program, the system and method presented herein are equally applicable to the playback of programs which are stored by other means. For example, pushed content which could be broadcast may also be stored offline (e.g., on a DVD) and later distributed to the user for playback. The program could also be played back from an on-demand server (e.g., playing video on demand.)

Referring to Fig. 4, a flow diagram illustrating one method employed by the interactive television system described above is shown. After the program is recorded on the storage device, playback of the program is initiated. The receiver is configured to detect applications in the recorded data. When an application is detected in the program, the application is launched. The manner in which applications are detected in the program depends upon how the program was stored.

Referring to Fig. 5, a flow diagram illustrating the detection of an application in a system configured to receive a program as a data stream is shown. If the application was recorded as a data stream, the receiver detects

an application by examining the sequential stream of data which is played back from the storage device. When the stream contains information indicating that the application is available, the receiver detects this information and thereby detects the application. The application is then launched.

Referring to Fig. 6, a flow diagram illustrating the detection of an application in a system configured to receive a program as a set of files is shown. If the program was recorded as a set of files, the detection of applications in the program proceeds in a different manner. When playback of the program is initiated, the receiver examines the stored files. In one embodiment, the application files include information defining validity ranges for the corresponding applications. The receiver compares the validity range for each application to a current playback index. If the current playback index falls within the validity range of a particular application, that application is considered to have been detected, and is launched.

The current playback index mentioned above is simply a relative time index used in the playback of the program. The validity ranges mentioned above comprise data which, in one embodiment, is determined by the receiver when the program is recorded. (It should be noted that in some embodiments, particularly those in which the program is played back from a prerecorded medium such as a DVD, the validity range may be predetermined and provided with the corresponding data object.) The validity range consists of a beginning time and an end time. The application is intended to be executed (or to be available for execution) between the beginning and end times. Thus, if playback of a program is initiated and the current playback index is within the validity range of an application, the receiver will launch the application.

This may be illustrated in the following example. Assume a program is broadcast from 1:00 to 2:00. The program contains an application which is valid during the entire program. If a user records the program from 1:30 to 2:30, the application is stored with a validity range from 1:30 to 2:00, or 30 minutes from the beginning of the recording. When the program is played back, the application will be valid for the first 30 minutes of the recording. If the user starts playback of the program and fast-forwards for 40 minutes, when normal playback is resumed, the application will no longer be valid and will not be restarted.

Whether the program was stored as a data stream or as a set of files, the detection of applications continues as the program is played back. Thus, as new applications are detected, they are launched. It should be noted that the capabilities of the receiver and the policies implemented in the execution environment of the receiver determine the effect on a currently executing application of launching another application. If the receiver is capable of executing only one application at a time, a currently executing application may have to be killed or suspended before another application can be launched. It may or may not be necessary to unload the first application from memory while the second application is executing. If the receiver can simultaneously execute more than one application, then the second application may be launched while the first application continues to run. The receiver may, however, implement a policy which prohibits executing applications simultaneously. The receiver may therefore be required to kill or suspend the first application upon launching the second, even though the receiver is capable of executing both.

As mentioned above, when a user plays back a program, he or she may wish to use special playback modes rather than simply playing the program back sequentially (i.e., in a normal play mode.) The special modes may include trick play modes, such as fast forward, slow motion and rewind, and may also include jump, seek and pause features. When special play modes are used, the program moves from a first point at which an application is

in a first state (e.g., executing) to a second point at which the application should be in a second state (e.g., terminated or suspended.) Because the portion of the program between the first and second points is not played (or executed,) certain signals and events which would normally cause an application to modify its state are not encountered. Care must therefore be taken to ensure that the lifecycle of the application resulting from use of the special play mode corresponds to the position in the program after the special play mode is stopped. ("Lifecycle" is used here to indicate the state of the application, including but not limited to states of execution, such as launch, suspend, resume and terminate, and any internal states defined by the application during execution.)

Because the application may skip an event (a signal or set of conditions) which should trigger a change of state in the application, it may be necessary to take some action to produce the change of state. In one embodiment, the receiver is configured to determine whether any events would occur between initiation of the special play mode and termination of the special play mode which would affect the lifecycle of the application. These events may include the receipt of particular signals or notifications, the existence of particular conditions, or other factors. The receiver is configured to generate signals or notifications corresponding to the skipped events, and to convey these signals or notifications to the application to modify its state. These signals and notifications may include kill signals, notifications that special play modes have been started or stopped, notifications that seeks have been initiated, module or trigger notifications, accelerated version notifications, and other signals or notifications that may be useful in playing back the program. It should be noted that the generation of signals and notifications may be dependent upon the existence of related conditions. For example, modules and triggers may be flagged to indicate whether notifications relating thereto should be provided to the applications. Generation of signals and notifications may also be conditioned upon whether they occur within a corresponding validity range.

The receiver is also configured to generate signals associated with application chaining and to provide the signals to applications in the program. "Chaining" refers to the execution of different applications in the program in relation to each other. The chaining policy defines how execution of certain applications affects other applications. For example, if a first application is currently executing and a second application is detected and launched, the chaining policy may define whether the first application is terminated or suspended or, if the receiver can concurrently execute both applications, whether they should both be executed at the same time. It should be noted that the capabilities of the receiver may affect the chaining policy, since the policy is implemented in the receiver. (For example, if the receiver can only execute one application at time, the chaining policy cannot have two applications executing concurrently.)

The signals provided by the receiver to the applications are typically generated sequentially (in the order they would have occurred in a normal playback mode) because the state of an application may depend on the order in which the signals are received. When the special play mode is a forward mode (e.g., fast forward,) the signals and notifications generated by the receiver are provided to the applications in their normal sequential order. When the special play mode is a reverse mode (e.g., rewind,) the signals may have to be generated in reverse order, or the receiver may have to generate signals which "undo," or reverse the effect of, the forward-play signals.

It should be pointed out that some applications may depend on live data reception to maintain their state. When a special playback mode is used to cause an application to move to a particular point in the playback of the program, precautions may need to be taken to ensure that the application is in the appropriate state after the program returns to a normal playback mode. This needs to be addressed for two different cases: cases in which

applications were authored with the intent that they would be recorded and played back; and cases in which applications were not intended to be recorded and replayed.

In the first case, an application is produced with the knowledge that it may be recorded and played back using special play modes. Such an application would typically be designed to accept notifications of these special play modes and to accommodate them. For example, an application can be configured to generate a query to determine the current position in the playback of the program. The application could then set its internal state according to the position in the program.

In the second case, an application is produced with the intent that it will be consumed as it is received. The application is not designed to jump from one position to another in the program except as the program progresses in a normal play mode. If a special play mode is initiated while such an application is executing, the application can simply be terminated and restarted at the new position in the program. The application may be allowed to save information (e.g., state information) to persistent storage such as the storage device when it is terminated. It should be noted that the application may be removed from memory when it is terminated, so it may have to be downloaded again from the data stream and restarted after the program has jumped to the new position.

Because these two types of applications are handled differently when special play modes are initiated, it is contemplated that the applications will be configured to indicate to the receiver whether they are capable of handling special play modes. It is also contemplated that some applications may be configured to prevent certain special play modes. For example, an application may be configured to prevent the user from rewinding or may allow the user to rewind only to certain positions, such as the beginnings of chapters.

While the present invention has been described with reference to particular embodiments, it will be understood that the embodiments are illustrative and that the invention scope is not limited to these embodiments. Many variations, modifications, additions and improvements to the embodiments described are possible. These variations, modifications, additions and improvements may fall within the scope of the invention as detailed within the following claims.

WHAT IS CLAIMED IS:

1. A method comprising:
receiving a broadcast signal, wherein said broadcast signal contains a program and wherein said program
contains one or more interactive applications;
storing said program on a storage device;
initiating playback of said program from said storage device; and
launching a first interactive application of said one or more interactive applications in response to
detecting said first interactive application during said playback of said program.
2. The method of claim 1 wherein said program is stored on said storage device as it is received, wherein
detecting said first interactive application comprises detecting said first interactive application is available from an
interactive application data stream of said program during said playback.
3. The method of claim 1 wherein storing said program includes storing an interactive application data
stream of said program, wherein said storing of said data stream comprises extracting from said program one or
more data objects and storing said data objects on said storage device as a set of files, wherein initiating playback of
said data stream comprises retrieving one or more of said set of files from said storage device and wherein detecting
said one of said one or more interactive applications comprises comparing a validity range associated with said one
of said one or more applications to a current playback index and determining that said current playback index is
within said validity range.
4. A method comprising:
providing a program stored on a storage device, wherein said program contains an interactive application;
initiating playback of said program from said storage device;
launching said interactive application;
initiating a special play mode of said program; and
conveying a notification signal to said interactive application during said special play mode.
5. The method of claim 4 further comprising:
initiating a special play mode of said program wherein during said special play mode, a current playback
index changes from a first value to a second value;
determining whether events affecting the state of said interactive application would have been encountered
in a normal play mode between said first value and said second value;
generating signals corresponding to said events; and
conveying said signals to said application.
6. The method of claim 5 wherein said signals are generated sequentially according to the order of said
corresponding events in a normal play mode.

7. The method of claim 4 wherein one or more of said notification signals are selected from the group consisting of: application kill signals; application launch signals; application pause signals; application resume signals; trick mode start notifications; trick mode end notifications; seek notifications; module notifications; trigger notifications; and accelerated version notifications.
- 5 8. The method of claim 4 further comprising said interactive application receiving an indication of a current position in said program and setting the internal state of said interactive application to correspond to said current position.
- 10 9. The method of claim 8 wherein said application receives said indication of said current position in said program while said program is in said special play mode.
10. The method of claim 4 further comprising:
initiating a special play mode of said program;
15 conveying a kill signal to said interactive application in said program;
terminating said special play mode; and
launching an interactive application in response to detecting said interactive application is available.
11. The method of claim 4 further comprising said interactive application:
20 indicating to a receiver on which said interactive application is executing whether said interactive application is configured to operate when a special play mode is initiated;
notifying said interactive application of said special play mode in response to detecting said interactive application is configured to operate during said special play mode; and
terminating said interactive application when said special play mode is used in response to detecting said
25 interactive application is not configured to operate during said special play mode.
12. The method of claim 4 further comprising:
broadcasting said program;
receiving said program; and
30 storing said program on said storage device.
13. A device comprising:
a receiver; and
a storage device coupled to said receiver; wherein said storage device is configured to store a program data stream including one or more interactive application data streams and to provide said program
35 data stream to said receiver for playback; and
wherein said receiver is configured to detect and launch said one or more interactive applications.

1/4

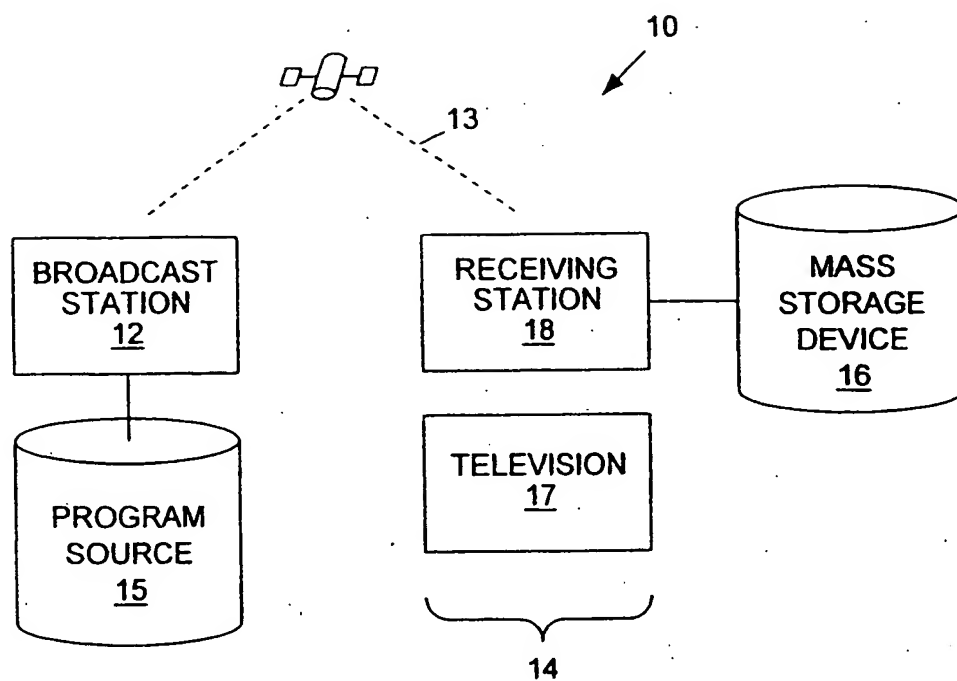


Fig. 1

2/4

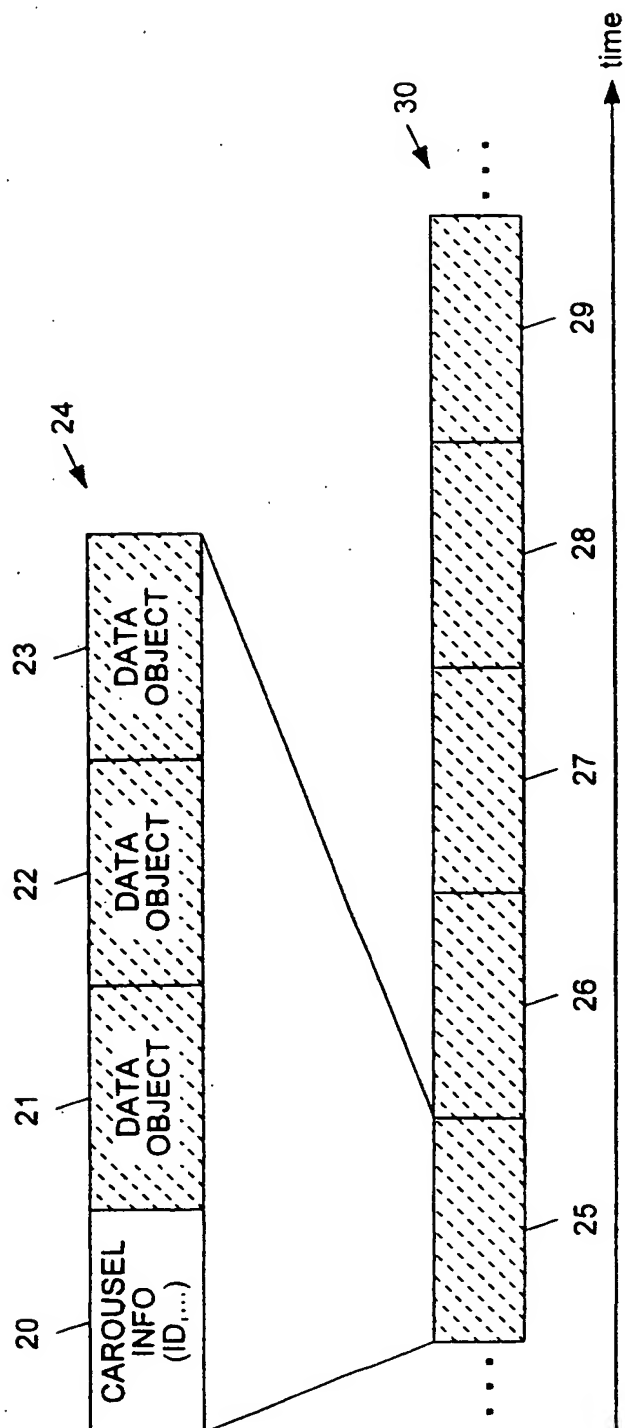


Fig. 2

3/4

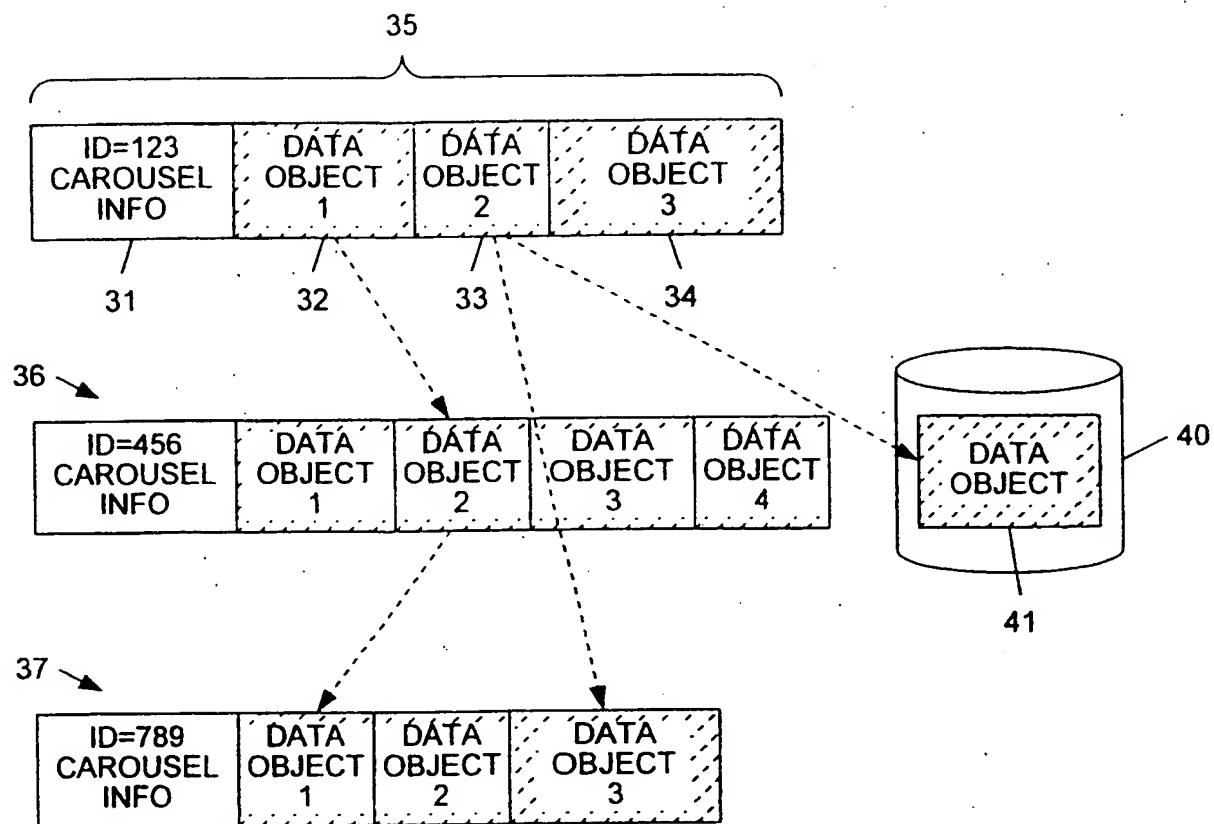


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/40908

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N5/92 H04N7/16

According to International Patent Classification (IPC) or to both national classification and IPC.

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04N 611B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 537 141 A (FREEMAN MICHAEL J ET AL) 16 July 1996 (1996-07-16) column 3, line 63 -column 4, line 2 column 29, line 63 -column 30, line 5	1,4, 13-15
A	EP 0 299 830 A (ACTV INC) 18 January 1989 (1989-01-18) page 4, line 23 - line 30	1,4,13
A	EP 0 949 816 A (THOMSON CONSUMER ELECTRONICS) 13 October 1999 (1999-10-13) paragraph '0006!	3,7

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

7 February 2001

Date of mailing of the international search report

14/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sindic, G

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/40908

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5537141	A	16-07-1996	AU 686795 B	12-02-1998
			AU 2290795 A	10-11-1995
			EP 0755608 A	29-01-1997
			WO 9528804 A	26-10-1995
			US 5585858 A	17-12-1996
EP 0299830	A	18-01-1989	US 4847700 A	11-07-1989
			AU 610887 B	30-05-1991
			AU 1631488 A	19-01-1989
			CA 1283202 A	16-04-1991
			JP 1138871 A	31-05-1989
EP 0949816	A	13-10-1999	US 5563648 A	08-10-1996
			CA 2145898 A	29-10-1995
			CN 1112333 A	22-11-1995
			DE 69515076 D	23-03-2000
			DE 69515076 T	13-07-2000
			DE 949816 T	25-01-2001
			EP 0680213 A	02-11-1995
			ES 2142966 T	01-05-2000
			ES 2147719 T	01-10-2000
			JP 8051596 A	20-02-1996
			SG 30363 A	01-06-1996